

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		21.04.24

NOTES1:

UL Standard

- 1.Rated voltage/current : 150V / 10A
- 2.Withstanding voltage : AC1300V/1Min.

IEC Standard

1. Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	4KV
Rate voltage(V)	400V
Rate current(A)	32A

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 3.50mm, Poles : N=04~48P
- 3.Operating temperature:-40°C~+105°C
- 4.Undimensioned tolerances:




Pitch range in mm		Nominal dimension range in mm						-	∩	∇
TO	Over	TO	Over	TO	Over	TO	Over	0.1/10		
6	10	24	30	60	100	150	150			
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'		

5.RoHS Compliance

Ordering Information

**JL15EDGRHD-350 XX X 0 X**

Pitch 350=3.50PH  
 No.of pins 4P~48P  
 Housing Color B=Black G=Green U=Blue R=Red W=White Y=Yellow O=Orange E=Grey  
 Packing 0=Pe bag T=Tube A=Tray

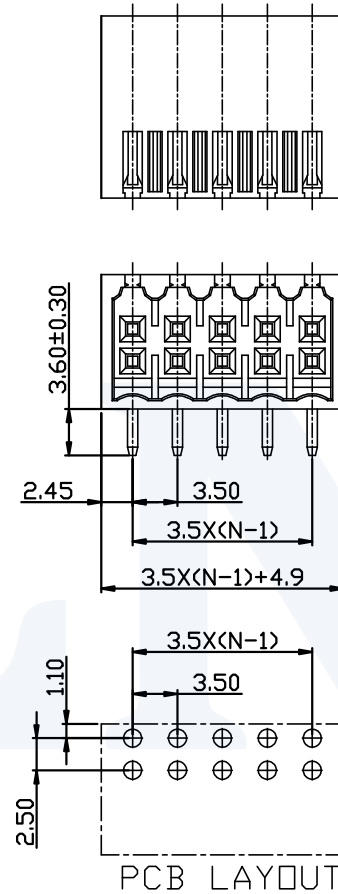

DRAW	SHUANGPING ZHENG	SCALE	FIT	<b>JILN</b> 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
		UNIT	mm		
CHECK	LICHAO LIU	SIZE	A4	PART NO.	JL15EDGRHD-350XXX0X
		SHEET	1/1	TITLE:	JL15EDGRHD-3.50-XXP插拔式公座
APPROVE	YONGLIANG GAO	PROJ.			