



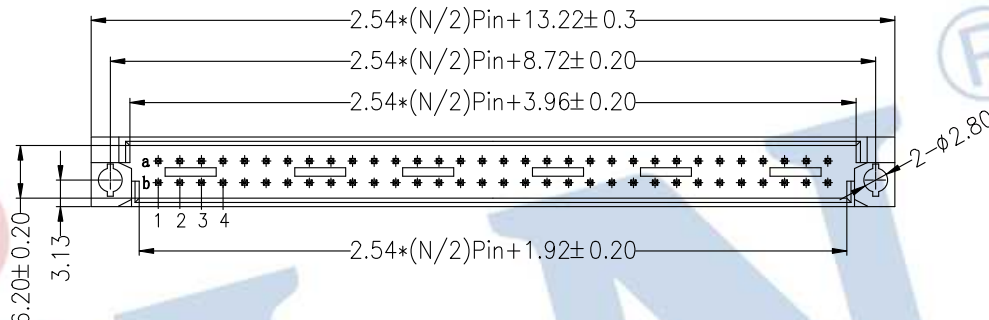

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C


Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester(UL94V-0)
 Resistance To Soldering Heat:
 245°C±5°C, 10s(PBT insulator)

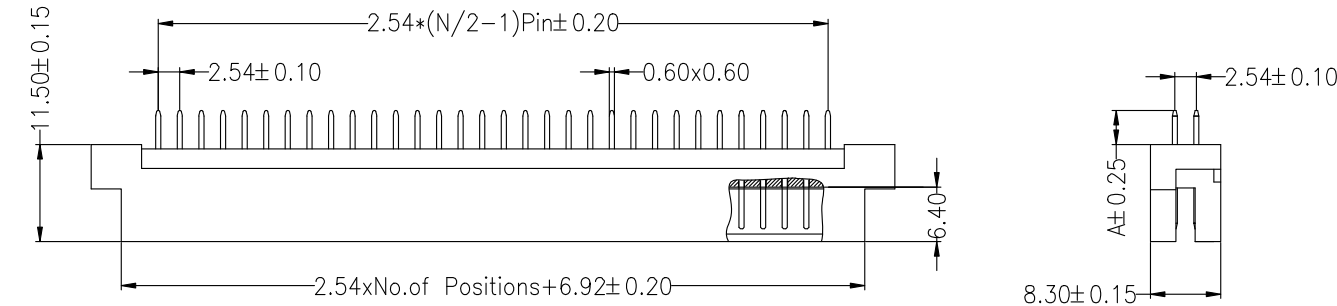

Ordering Information

3511 2 XX B M S XX B N A X

No.of Pins 10, 16, 20 32, 44, 48 64	Contact Type M=Male	Contact Plating G0:Gold Flash S0:Gold Flash/Tin S1:3U" Gold/Tin S2:5U" Gold/Tin S3:10U" Gold/Tin S4:15U" Gold/Tin	Stream Code
----------------------------------------------	------------------------	-------------------------------------------------------------------------------------------------------------------------------------	-------------

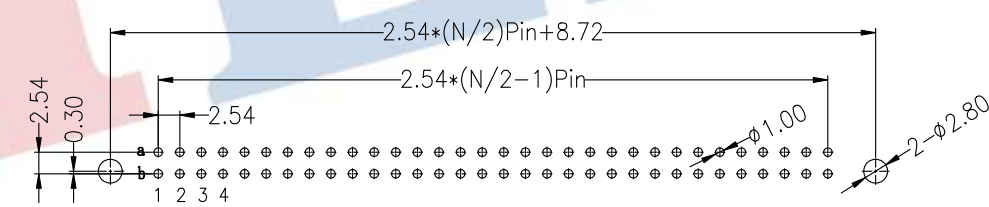

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE± 0.05)

Dimension antitheses list	
ITEM	A
Standard	4.00

				OPERATION	DRAW	YiYuSheng	14.09.16	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588 PART NO. 35112XXBMSXXBNAX TITLE: 欧式插座 公座 180度 2xNPIN 成品系列图
				X.X	±0.30			UNIT	mm	
B	2014.09.16	增加UL标识		X.XX	±0.20	CHECK		SIZE	A4	
A0	2012.04.10	NEW DRAWING		X.XXX	±0.10			SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	±3°	APPROVE		PROJ.	☯	
				DIM	TOL					