
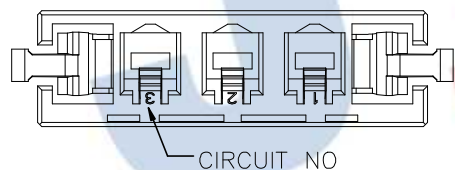
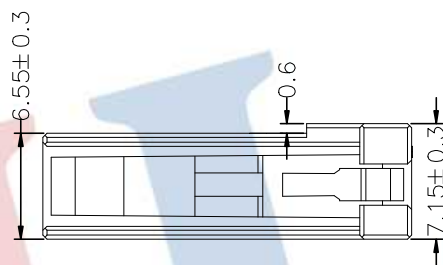
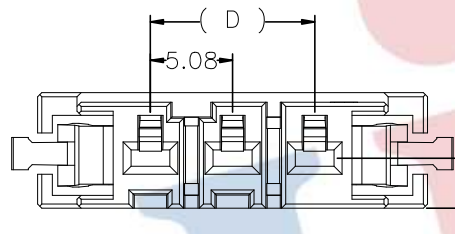


**HSF RoHS**

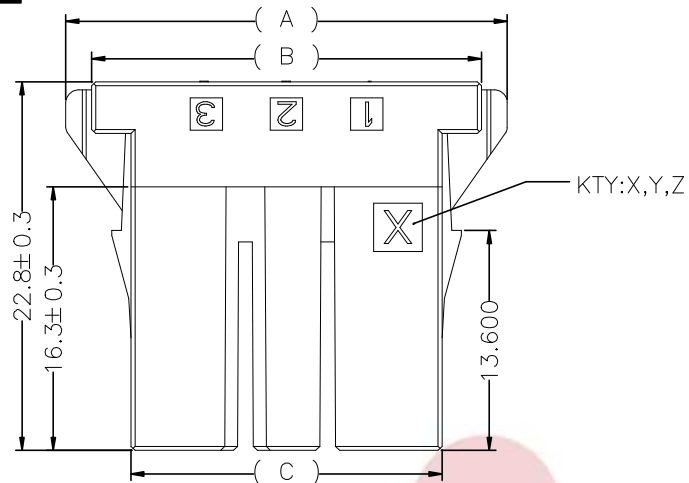

- 1 MATERIAL:PBT BLACK UL94V-0.
- 2 WORKING TEMPERATURE:-55°C~ +105°C
- 3 THE SHAPE,SIZE AND POSITION OF THE CHARACTER SHOW THE OUTLIE THEY DON'T SHOW DETAILS

KEYING LOCATION	KEYING	A	B	C	D	JILN P/N	TE P/N
	X	22.20	19.02	14.16	5.08	A5083-02B02	1-178128-2
	Y	22.20	19.02	14.16	5.08	A5083-02B03	2-178128-2
	X	27.30	24.10	19.24	10.16	A5083-03B04	1-178128-3
	Y	27.30	24.10	19.24	10.16	A5083-03B05	2-178128-3
	Z	27.30	24.10	19.24	10.16	A5083-03B03	3-178128-3

OPERATION	DRAW	YangHuiOu	2019.06.20	SCALE	FIT
X.X ±0.30	CHECK			UNIT	mm
X.XX ±0.20				SIZE	A4
X.XXX ±0.10				SHEET	1/1
Angle ±3°	APPROVE			PROJ.	
DIM TOL				TITLE:	

**JILN**® 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONICS CO.,LTD  
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2019.06.20	NEW DRAWING	

PART NO.	A5083-XXBOX
TITLE:	5.08 PITCH RECEPTACLE HOUSING(KEY:X,Y,Z) 178128