








**SPECIFICATIONS**

Rated Current:1.0AMP  
 Contact Resistance:30mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Resistance To Soldering Heat:  
 260° C±5° C, 10s(LCP insulator)

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

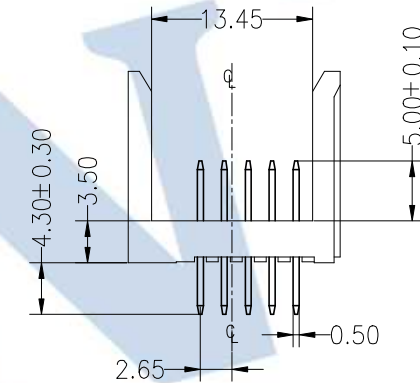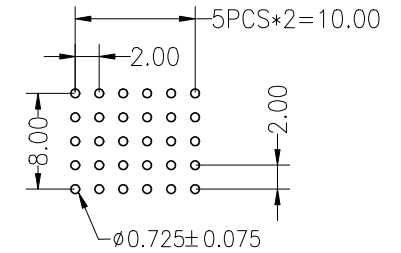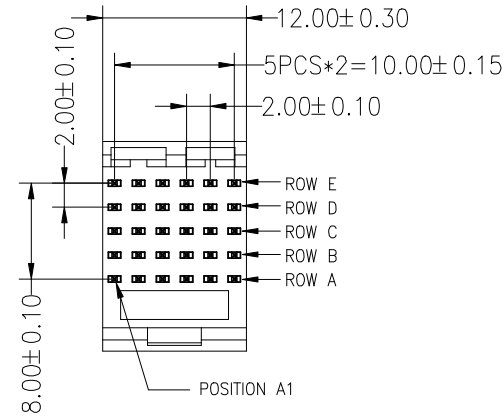

**Ordering Information**

**3510 5 30 A M S XX PN X X**

No.of Pins  
5x6P

Contact Type  
F:Female  
M:Male

Contact Plating  
G0:Gold Flash  
S0:Gold Flash/Tin  
S1:2U" Gold/Tin  
S2:5U" Gold/Tin  
S3:10U" Gold/Tin  
S4:15U" Gold/Tin  
S5:30U" Gold/Tin  
SN:Tin

Packing  
A:Tray  
T:Tube

				OPERATION		DRAW	YiYuSheng	19.09.21	SCALE	FIT
				X.X	±0.30				UNIT	mm
				X.XX	±0.20	CHECK			SIZE	A4
A0	2019.09.21	NEW DRAWING		X.XXX	±0.10				SHEET	1/1
REV	DATE	MODIFICATION DESCRIPTION		CHANGE		APPROVE			PROJ.	◆

**JILN**® 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONICS CO.,LTD

Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO. 3510530AMSXXPNXX

TITLE: FUTURE BUS,5\*6 Male 180°,PRESS-FIT