




SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 260° C±5° C, 10s(LCP insulator)


Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

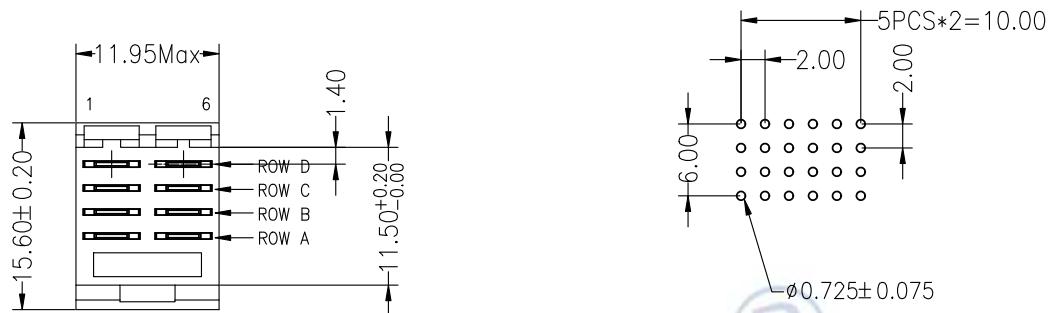

Ordering Information

3510 4 08 A M S XX P N X X

- No. of Pins: 4*2P
- Contact Type: F:Female, M:Male
- Contact Plating: G0:Gold Flash, S0:Gold Flash/Tin, S1:2U" Gold/Tin, S2:5U" Gold/Tin, S3:10U" Gold/Tin, S4:15U" Gold/Tin, S5:30U" Gold/Tin, SN:Tin
- Packing: A:Tray, T:Tube

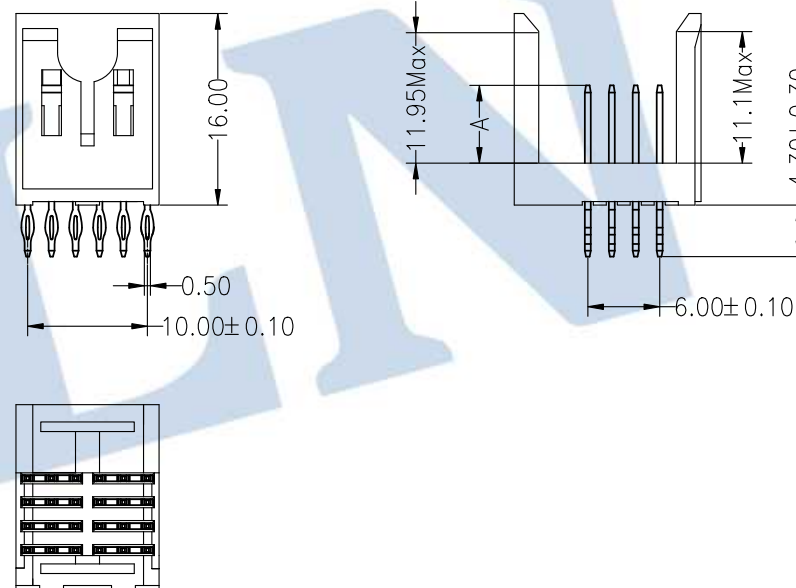

P/N	A
01	6.5
02	7.25
03	8.0

				OPERATION		DRAW	Tim Chu	21.09.06	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	3510408AMSXXPNXX
A0	2021.09.06	NEW DRAWING		X.XXX	±0.10	APPROVE			SHEET	1/1	TITLE:	FUTURE BUS,4*2 Male 180°,PRESS-FIT
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL			PROJ.	◆		