

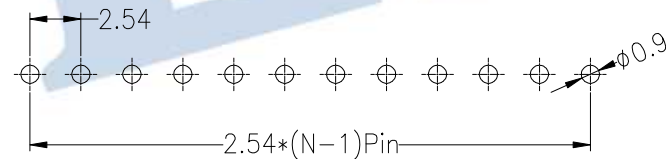


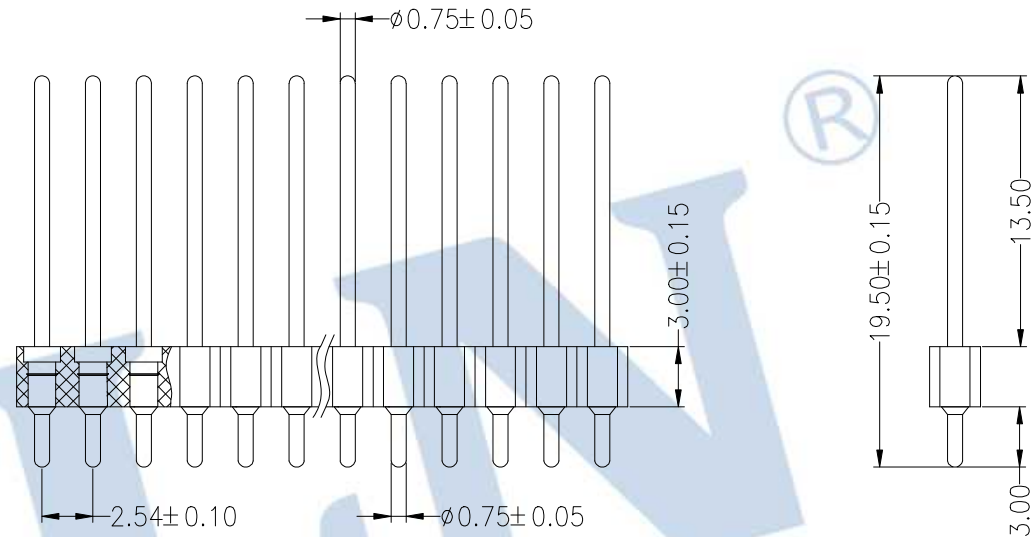

SPECIFICATIONS

Current Rating:3.0AMP
 Contact Resistance:10mΩ Max
 Dielectric Strength:Min 1000V AC RMS
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 (PPS)260°C±5°C For 5~10 Second

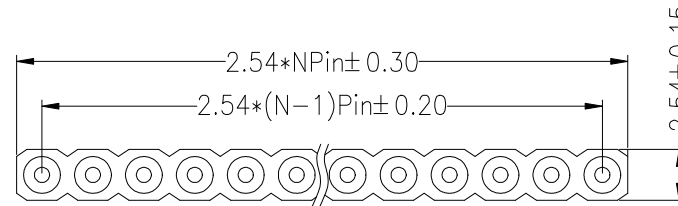

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Ordering Information

3610 30 1 XX S XX 195 XX

No.of Pins
NPIn
N=02~40

Contact Plating
 G1:1U" Gold
 G2:1.5U" Gold
 G3:2U" Gold
 G4:3U" Gold
 G5:5U" Gold
 S0:Gold Flash/Tin
 SN:Tin

Pin Length
195=19.50mm

Stream code

				OPERATION		DRAW		Wei Chen		2022.05.21		SCALE		FIT		JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X ±0.30		CHECK						UNIT		mm			
				X.XX ±0.20								SIZE		A4		PART NO.	
A0		2022.05.21		NEW DRAWING								SHEET		1/1		3610301XXSXX195XX	
REV		DATE		MODIFICATION DESCRIPTION		CHANGE		APPROVE				PROJ.				TITLE:	
1		2		3		4		5		6		7		8		9	

JILN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO. 3610301XXSXX195XX

TITLE: 2.54x3.0 单排双头针 L=19.5 针尖0.75