
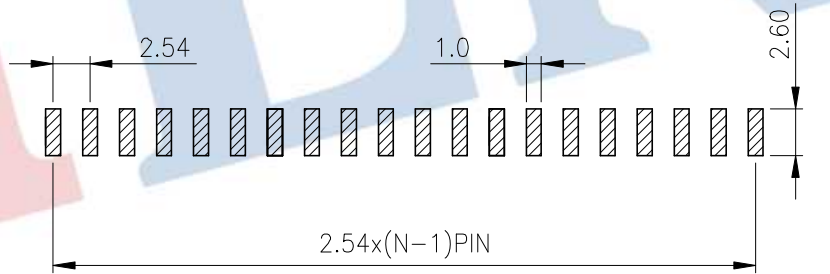
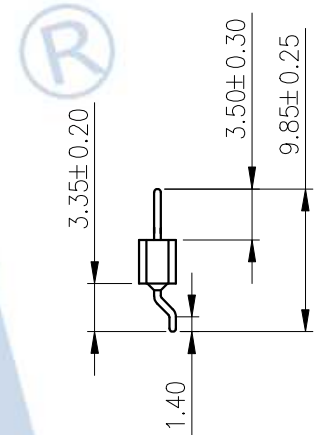
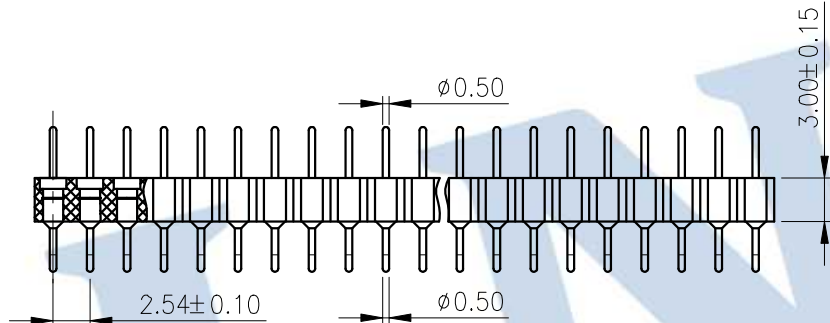


Materials
 Pin: Brass, machined, (H59-3)
 Plating: Gold plated: 1.25u"m/50u"nickel, full gold
 Insulator body (black): PPS (UL94V-0)

Electrical
 Current rating: 3 Amps/contact max.
 Contact resistance: 20mΩ
 Insulation resistance: 1000MΩ
 Operating voltage: 60 AC/DC

Mechanical
 Operating temperature : Gold plated: -55°C to +105°C
 (Continuous) -67°F to +105°F
 Tin plated: -40°C to +105°C
 Soldering temperature: 260°C, 10s max

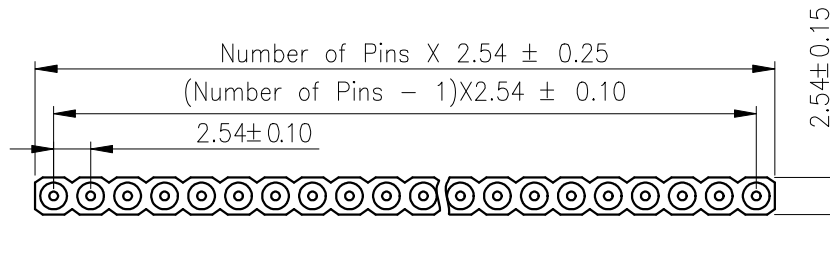

Ordering Information

3610 30 1 XX Z XX 100 0X

No. of Pins
2-40

Contact Plating
 SN: Tin
 G1: Gold Flash
 G2: 2U" Gold
 G3: 3U" Gold
 G4: 5U" Gold
 G5: 10U" Gold

Length
100=10.0mm

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

				OPERATION		DRAW	WZG	14.04.01	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK	SIZE	A4	PART NO.	3610301XXZXX1000X			
A0	2014.04.01	NEW DRAWING		X.XXX	±0.10	APPROVE	SHEET	1/1	TITLE:	2.54X3.0 双头针 卧贴 L=10.0 针尖0.50			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL	PROJ.						